

STUDIO•M

SM260903

Please consult your electrician for hanging fixture and wiring.

Diagram A


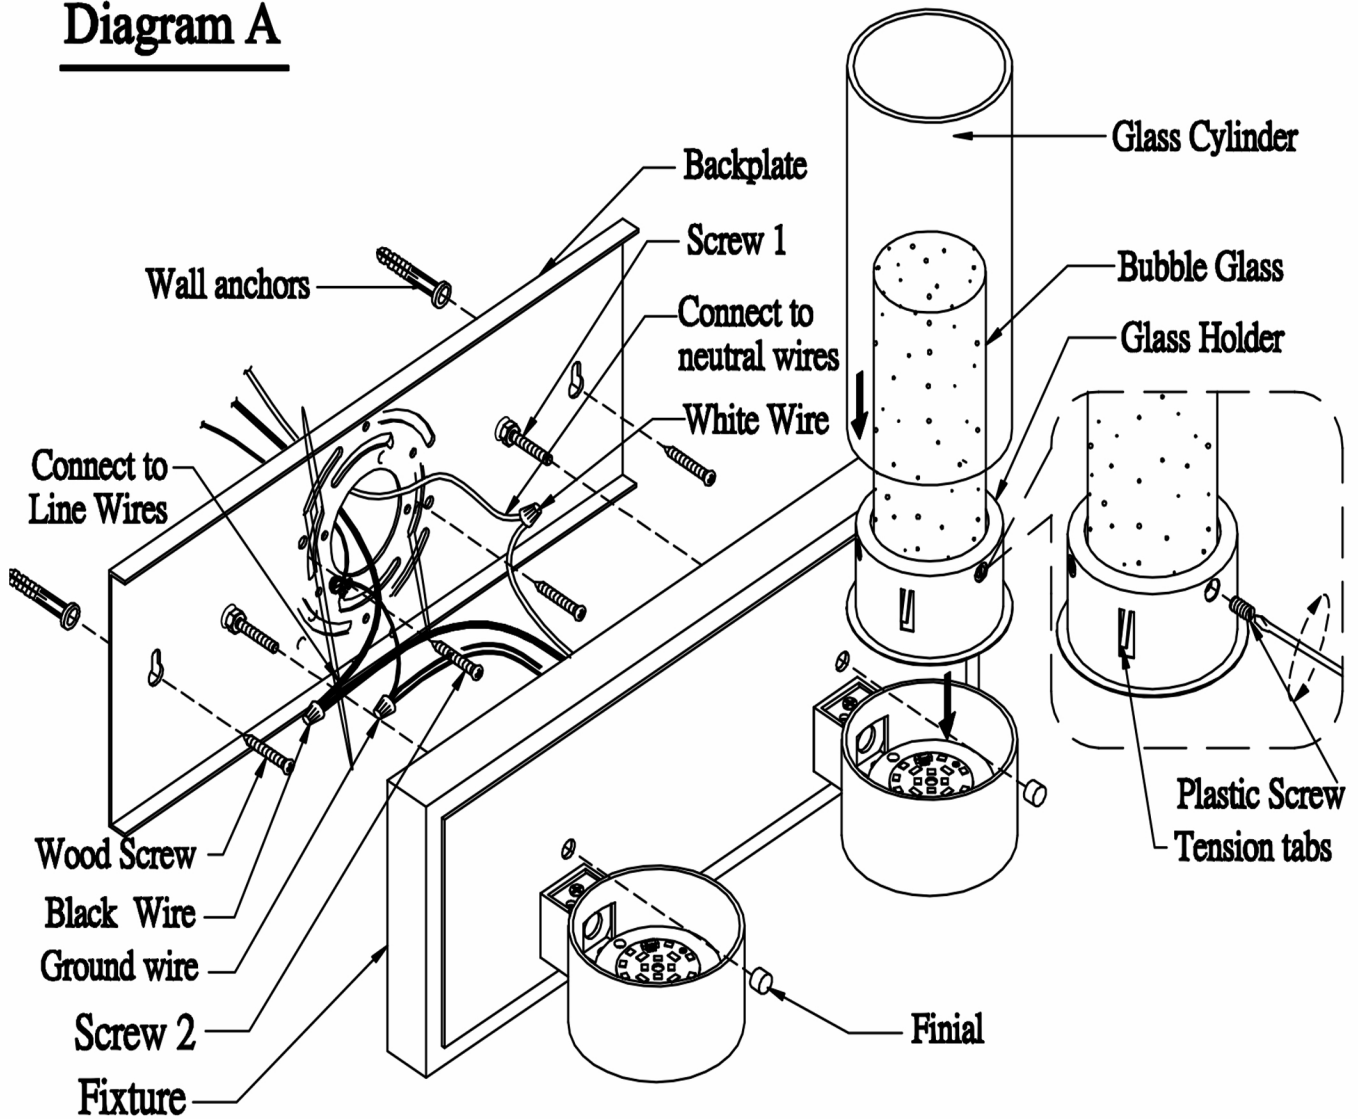


Diagram B

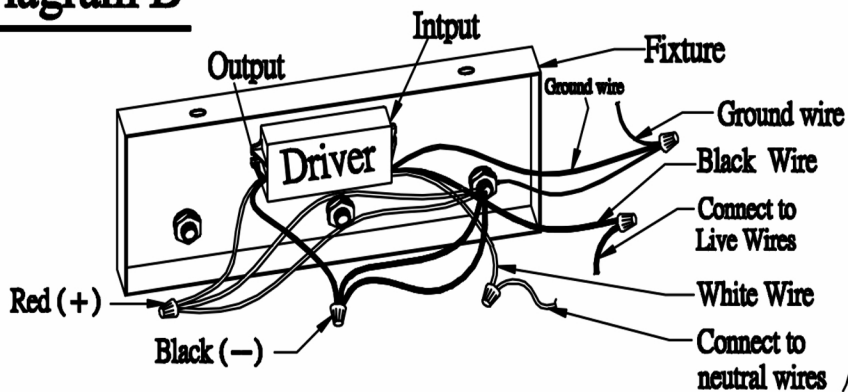

STUDIO • M

SM260903

Please consult your electrician for hanging fixture and wiring.

1. Electrical Wiring:

WARNING: The Fixture wires need to be connected to DRIVER found in the backplate. Do not connect the Red and Black wire from fixture directly to power source or a Blowout/Shortcircuit might occur.

Connect the WHITE wire of the Driver to the White/Neutral wire from electrical source using the wire nut provided. Connect the BLACK wire of the Driver to the Black/Live wire from electrical source using the wire nut provided. Connect the GROUND wire from fixture and Ground of the electrical source to the Green Ground screws on the backplate.

WARNING: Please refer to the Electrical wiring instructions provided for safety and proper procedure of electrical wiring. Consult a qualify electrician if you are not familiar with electrical wiring.

Turn off power at breaker for outlet fixtures is being installed to.

- 1. Install backplate to outlet box using (screw 2)**
- 2. Mark for holes for wall anchors**
- 3. Remove backplate from outlet box**
- 4. Drill 3/16" holes at marked locations**
- 5. Insert wall anchors into drilled holes**
- 6. Re-install backplate to outlet box using (screw 2)**
- 7. Insert wood screws into wall anchors and tighten to secure**
- 8. Wire fixture assembly per Diagram B**
- 9. Install fixture assembly to Backplate and secure with finials**
- 10. Install bubble glass into glass holder and tighten plastic screw to secure**
- 11. Insert glass holder into fixture casting**
- 12. Insert glass cylinder into fixture casting***

***Pull out tension tabs to increase stability of glass cylinder if necessary**