


# STUDIO•M

SM260907

Please consult your electrician for hanging fixture and wiring.


## Diagram A

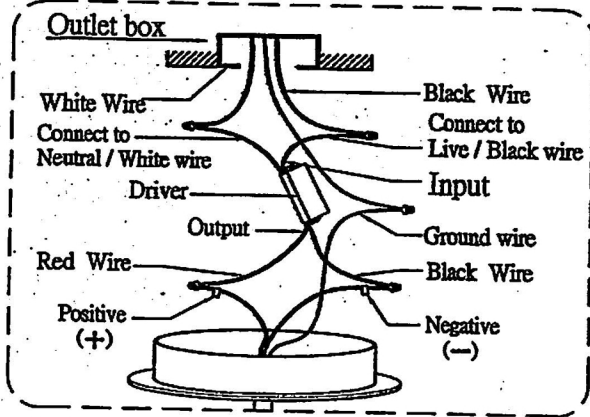

Turn off power at breaker for outlet fixtures is being installed to.

1. Install Crossbar assembly to outlet box using machine screw
2. Assemble the fixture per Diagram B.
3. Add 6" and 12" rod to the fixture to your desire height
4. Hook the Hanger Loop (B) onto Hook (C) on fixture
5. Attach Screw Collar Loop to Crossbar Assembly.
6. Wire fixture assembly per Diagram A
7. Install fixture assembly to Canopy by hanging the Hook on Rod to the Collar Loop and secure the Canopy and Metal Plate with the Collar Loop Ring.
8. Install bubble glass into glass holder and tighten plastic screw to secure
9. Insert glass holder into fixture casting
10. Insert glass cylinder into fixture casting\*

## Diagram B

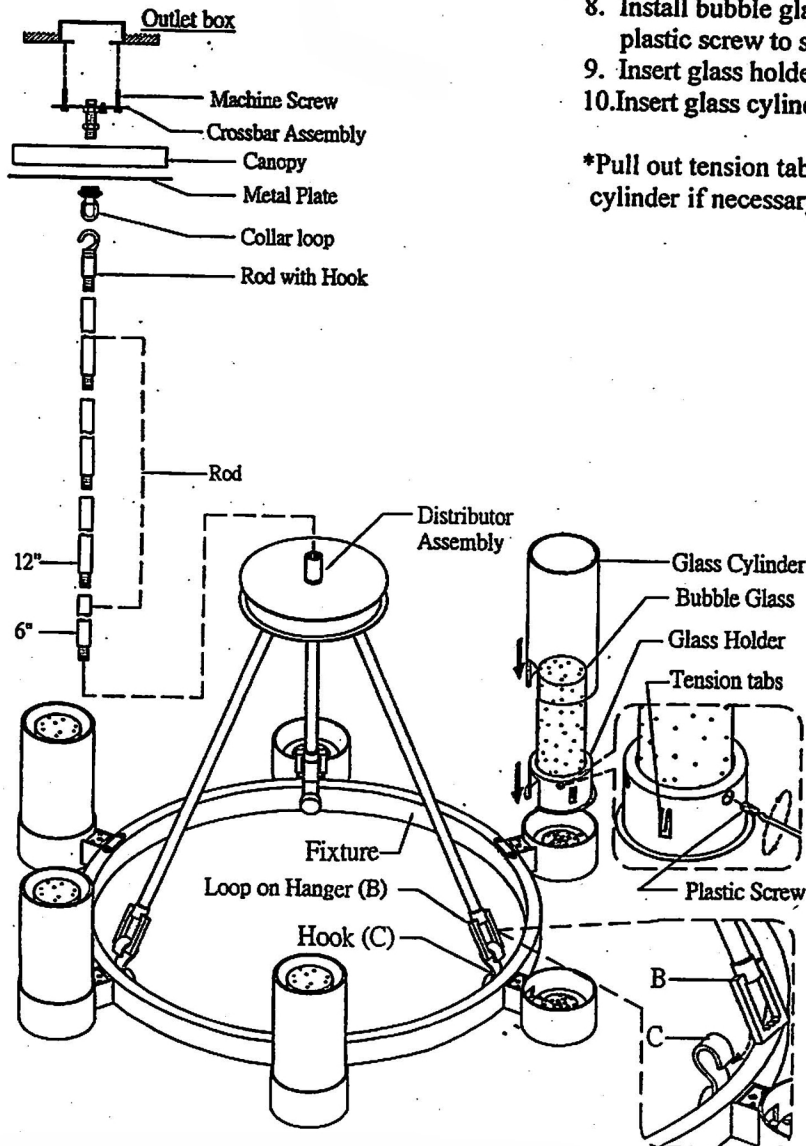

\*Pull out tension tabs to increase stability of glass cylinder if necessary