
Please consult your electrician for hanging fixture and wiring.

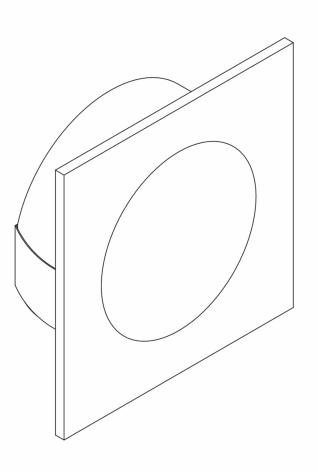


To prevent water intrusion, caulk around back-plate where fixture meets the wall using outdoor silicone sealant. Leave a small gap at the bottom to allow moisture to exit.

STUDIO • M

SM451403

Please consult your electrician for hanging fixture and wiring.

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation










Locate all hardware & components before discarding packaging

3.)

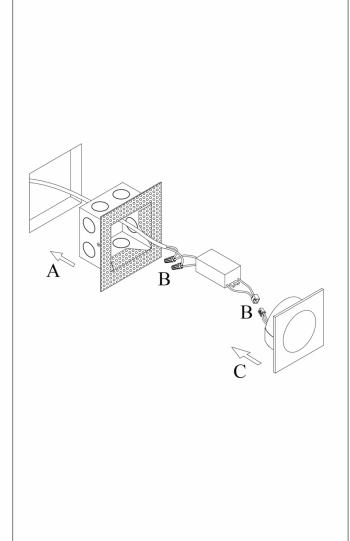




Step.1: Fix the outlet box to the hole.



Step.2: Connect step light to driver provided.

Wire driver wires to low voltage supply wires.



Step.3: Caulk around the housing with silicone sealant to prevent water intrusion.

Leave a gap at the bottom to let moisture escape. Then install fixture to housing.

Cleaning & Care:

Clean with soft cloth and a mild detergent. Do not use abrasive cleaner.

Page 2 of (2)