


PRODUCT DESCRIPTION

A central, cylinder diffuser of opal white acrylic diffuses LED lighting within a cavity of thin ribbed glass of various lengths. Both imaginative and functional, the bright pendants encase an additional down light recessed within a Polished Chrome, Naturally Aged Brass or Matte Black housing casting light downward.

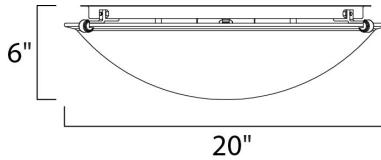

MEASUREMENTS

DIMENSION	: 4.75" W x 14.5" H x 2.5" Ext
MAX OAH	: 4.75" W x 4.75" H
HANGING WEIGHT	: 2.43 lb
LAMPING	
INPUT VOLTAGE	: 120-277V
LUMENS	: 800 Rated (600 Del.)
BULB	: 10W LED PCB Integrated , 10W Total
BULB INCLUDED	: (Integrated)
DIMMABLE	: 3-in-1: Triac, ELV, or 0-10V
CRI	: 90 CRI
COLOR TEMP	: 3000K

FINISHES OPTION

	Black (BK)
	Natural Aged Brass (NAB)
	Polished Chrome (PC)

GLASS

Clear Ribbed 144

MATERIAL

Steel, Aluminum, Glass

RATINGS

cETLus
Damp Location
ADA



ADDITIONAL

RATED LIFE 50000 Hours
OPERATING TEMPERATURE:
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

STUDIO•M

Modifications or Customizations: Please email contract@studiomlighting.com

Sample Request: Please email order@studiomlighting.com with subject line

"Sample Order_ [Project Name] / [Specifier/Designer]"

All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments