




PRODUCT DESCRIPTION

A central, cylinder diffuser of opal white acrylic diffuses LED lighting within a cavity of thin ribbed glass of various lengths. Both imaginative and functional, the bright pendants encase an additional down light recessed within a Polished Chrome, Naturally Aged Brass or Matte Black housing casting light downward.

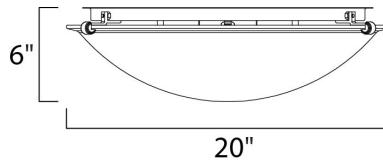

MEASUREMENTS

DIMENSION

: 4.75" W x 14.5" H x 2.5" Ext

MAX OAH

: 4.75" W x 4.75" H

HANGING WEIGHT

: 2.43 lb

LAMPING

INPUT VOLTAGE

: 120-277V

LUMENS

: 800 Rated (600 Del.)

BULB

: 10W LED PCB Integrated , 10W Total

BULB INCLUDED

: (Integrated)

DIMMABLE

: 3-in-1: Triac, ELV, or 0-10V

CRI

: 90 CRI

COLOR TEMP

: 3000K

FINISHES OPTION



Black (BK)



Natural Aged Brass (NAB)



Polished Chrome (PC)

GLASS

Clear Ribbed 144

MATERIAL

Steel, Aluminum, Glass

RATINGS

cETLus

Damp Location

ADA



ADDITIONAL

RATED LIFE 50000 Hours

OPERATING TEMPERATURE: -20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

STUDIO•M

Modifications or Customizations: Please email contract@studiomlighting.com

Sample Request: Please email order@studiomlighting.com with subject line

"Sample Order_ [Project Name] / [Specifier/Designer]"

All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments