

OUTPOST | OUTDOOR WALL MOUNT


SM266101 | SM266103 | SM266105 | SM266106 | SM266109

- Aluminum Construction
- Available in Incandescent or LED
- Available in Brushed Aluminum or Black
- Gasketed glass lens for direct water contact applications
- Photocell option available
- Dark Sky option available



PRODUCT DESCRIPTION

Classic cylinder up and down lights provide directional light without glare. Available in 3 sizes with both incandescent and LED versions. Available in Architectural Bronze, Aluminum, or Black.

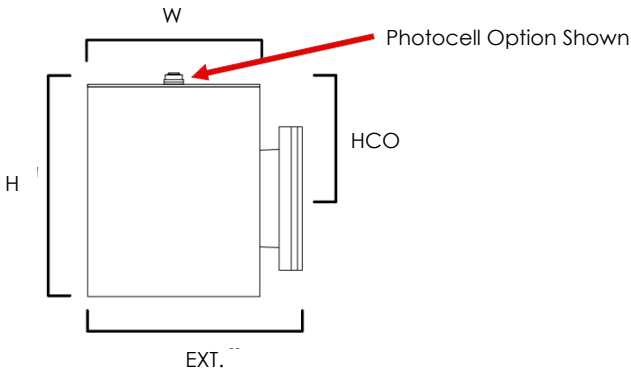

FINISHES OPTION

- Black
- Bronze
- Brushed Aluminum

MATERIAL

Aluminum

RATINGS

cETLus
Wet Location
*Dark Sky Optional



ADDITIONAL

INSTALL UP/DOWN: UP
OPERATING TEMPERATURE:
-20°C (-4°F), 40°C (104°F)

PHOTOMETRIC: Report Found Online

MEASUREMENTS

MODEL	DIMENSION
* 26101	5"W x 7.25"H x 6.25"Ext.
26103	5"W x 15"H x 6.25"Ext.
26105	5"W x 22"H x 6.25"Ext.
* 26106	6"W x 7.25"H x 7.25"Ext.
26108	6"W x 15"H x 7.25"Ext.
26109	6"W x 22"H x 7.25"Ext.

*PCH- Photocell option available

LAMPING

BULB TYPE	LUMENS		DIMMABLE	INPUT
	RATED	DEL		
1 x 40W AC Integrated E26	480	370	NO	120V
2 x 40W AC Integrated E26, 80W Total	480	400	NO	120V
2 x 40W AC Integrated E26, 80W Total	470	360	NO	120V
1 x 40W AC Integrated E26	260	200	NO	120V
2 x 40W AC Integrated E26, 80W Total	510	390	NO	120V
2 x 40W AC Integrated E26, 80W Total	470	360	NO	120V

Always consulta qualified electrician before installing any lighting product.

STUDIO•M

Modifications of Customization : Please email contract@studiomlighting.com
Sample Request : Please email Order@studiomlighting.com with line
"Sample Order _ [Project Name] / [Specifier/Designer]"
All samples are subject to Studio M approval and must show proof of project and/or explanation

Job Name:	Job Type:
Quantity:	Comments

StudioMlighting.com - 1.626.956.4209