

COUNTERMAX MX-LD-AC | UNDERCABINET LED DISC

SM563830 / SM563832 / SM563835 / SM563836


- Surfaced or Recessed installation with 30°swivel
- Available in 2700K and 3000K Color Temperature, CRI 90+
- Line Voltage Construction, no driver needed
- Aluminum heat sink
- Link up to 20 units on single power supply
- Dimmable with Triac Dimmer
- Not suitable for enclosed cabinets
- Comes individual or in packs (3 pucks)

Job Name:	Job Type:
Quantity:	Comments:



PRODUCT DESCRIPTION

The versatile MX-LD-AC LED disc features two piece aluminum construction that allowing for surface mounting all recessed. They are designed for daisy chain installation of up to 20 discs on one power supply. Fully dimmable with ELV and Triac dimmers. This combination of versatility, safety, energy efficiency and dimmability make the MX-LD-AC LED discs the smart choice for disc lighting.

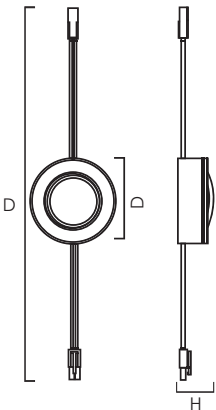

MEASUREMENTS

MODEL	DISC	DIMENSION	HANGING WEIGHT
SM563830	1	2.75"D x 1"H	0.38 lb
SM563832	1	2.75"D x 1"H	0.38 lb
*SM563835	3	2.75"D x 1"H	1.50 lb
*SM563836	3	2.75"D x 1"H	1.50 lb

LAMPING

MODEL	BULB TYPE	CRI	LUMENS INIT.	DEL	COL TEMP.	DIMMABLE	INPUT
SM563830	1 x 4W PCB LED (Integrated)	90+	250	200	3000K	Triac CL	120V
SM563832	1 x 4W PCB LED (Integrated)	90+	250	200	2700K	Triac CL	120V
*SM563835	3 x 4W PCB LED (Integrated)	90+	250	200	3000K	Triac CL	120V
*SM563836	3 x 4W PCB LED (Integrated)	90+	250	200	2700K	Triac CL	120V


\*Kit required (sold separately)

INCLUDES:

- Two mounting screws
- One 12" Connecting Cord

Always consult a qualified electrician before installing any lighting product

OPTIONAL



Two piece Aluminum Construction for both Surface and Recessed Installation



SM563885 BK, WT  
72" Power Cord



SM563886 BK, WT  
12" Connecting Cord




SM563887 BK, WT  
24" Connecting Cord



SM563838 BK, WT  
Junction Box  
4"L x 2.5"W x 1"H

FINISH OPTIONS:

- Anodized Bronze (BRZ)
- Satin Nickel (SN)
- White (WT)



MATERIAL:

Aluminum  
Frosted Acrylic Lens

RATINGS:

ETL/cETL  
Dry Location  
Dimmable  
Title 24 JA8 Compliant  
Energy Star



ADDITIONAL:

ROTATION : 30° SWIVEL  
RATED LIFE : 35,000 Hours  
OPERATING TEMP : -20° C (-4°), 40°C (104°F)  
PHOTOMETRIC : Report Found Online

STUDIO•M

For Modifications or Customizations, please email [contact@studiomlighting.com](mailto:contact@studiomlighting.com)  
For Sample Request, please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line: "Sample Order\_[Project Name]/[Specifier/Designer]"  
All Samples are subject to Studio M approval and must show proof of project and/or explanation.