

LENCIR LED LINEAR | SURFACE MOUNT

SM567742 / SM567743


- Edge-Lit Technology
- Aluminum extruded body for better heat dissipation
- Available in 3000K / 4000K color temperature
- Approved for use in closets and storage spaces
- Suitable for Closets according to NEC Section 410.8 & 410.16
- Dimmable with ELV dimmer at 120V
- 120-277 Input Voltage
- Energy Star listed
- Easy to install: Fits 4" Outlet Box
- Not recommended for pancake box
- Suitable for Wet location
- ETL/cETL IP65

Job Name:	Job Type:
Quantity:	Comments:



PRODUCT DESCRIPTION

Lencir was designed for the discriminate consumer who wants the low profile look of recessed without the high cost. Manufactured of die cast aluminum, Lencir brings ultimate heat dissipation to its edge lit technology. Edge lighting gives very even light distribution while dispersing heat over a larger area. The result of this is longer LED life and better light diffusion.

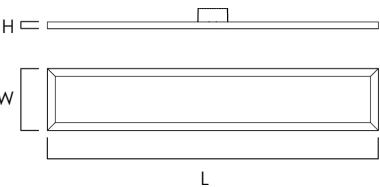

MEASUREMENTS

DIMENSIONS	: 24"L x 4.5"W x 0.5"H
HANGING WEIGHT	: 1.98 lb
HCO	: 0.5"
BP Width	: 4.1"
	MAX OH : 0.5"
	MIN OH : 0.5"

LAMPING

INPUT VOLTAGE	: 120-277V
BULB	: 18W PCB LED (Integrated)
DIMMABLE	: ELV Dimmer at 120V
CRI	: 90+

Model	Color Temp.	Lumens
SM567742	3000K	1300
SM567743	4000K	1600

FINISHES OPTIONS:

White (WT)



MATERIAL:

Aluminum
PMMA Acrylic Diffuser

RATINGS:

Closets Rated: NEC 410.8 & 410.16
ETL/cETL IP65
Wet Location
Energy Star



ADDITIONAL:

RATED LIFE: 50,000 Hours
OPERATING TEMP: -20° C (-4°), 40°C (104°F)
PHOTOMETRIC: Report Found Online

Always consult a qualified electrician before installing any lighting product



For Modifications or Customizations, please email contract@studiomlighting.com
For Sample Request, please email order@studiomlighting.com with subject line: "Sample Order_[Project Name]/[Specifier/Designer]"
All Samples are subject to Studio M approval and must show proof of project and/or explanation.