

LENCIR LED LINEAR | SURFACE MOUNT

SM567746 / SM567747


- Edge-Lit Technology
- Aluminum extruded body for better heat dissipation
- Available in 3000K / 4000K color temperature
- Dimmable with ELV dimmer at 120V
- Approved for use in closets and storage spaces
- Suitable for Closets according to NEC Section 410.8 & 410.16
- 120-277 Input Voltage
- Energy Star listed
- Easy to install: Fits 4" Outlet Box
- Not recommended for pancake box
- Suitable for Wet location
- ETL/cETL, IP65

Job Name:	Job Type:
Quantity:	Comments:



PRODUCT DESCRIPTION

Lencir was designed for the discriminate consumer who wants the low profile look of recessed without the high cost. Manufactured of die cast aluminum, Lencir brings ultimate heat dissipation to its edge lit technology. Edge lighting gives very even light distribution while dispersing heat over a larger area. The result of this is longer LED life and better light diffusion.

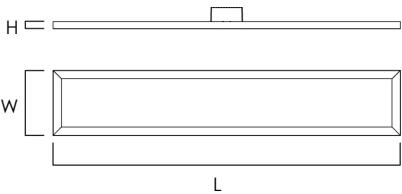

MEASUREMENTS

DIMENSIONS	: 48"L x 4.5"W x 0.5"H
HANGING WEIGHT	: 3.97 lb
HCO	: 0.5"
BP Width	: 4.1"
MAX OH	: 0.5"
MIN OH	: 0.5"

LAMPING

INPUT VOLTAGE	: 120-277V
LUMENS	: 3200 Rated (2500 Del.)
BULB	: 36W PCB LED (Integrated)
DIMMABLE	: ELV Dimmer at 120V
CRI	: 90+

Model	Color Temp.
SM567746	3000K
SM567747	4000K

FINISHES OPTIONS:

White (WT)



MATERIAL:

Aluminum  
PMMA Acrylic Diffuser

RATINGS:

Closets Rated: NEC 410.8 & 410.16  
ETL/cETL IP65  
Wet Location  
Energy Star



ADDITIONAL:

RATED LIFE: 50,000 Hours  
OPERATING TEMP: -20° C (-4°), 40°C (104°F)  
PHOTOMETRIC: Report Found Online

Always consult a qualified electrician before installing any lighting product

STUDIO•M

For Modifications or Customizations, please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)  
For Sample Request, please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line: "Sample Order\_[Project Name]/[Specifier/Designer]"  
All Samples are subject to Studio M approval and must show proof of project and/or explanation.