

# LENCIR LED LINEAR PENDANTS | SURFACE MOUNT


## SM567842/ SM567846

- New models feature 120-277V input
- Ultra thin 0.5" H
- Dimmable with Triac Dimmer, CRI 90+
- 50,000 Hours Rated life, 3000K
- Suitable for Damp location
- ETL/cETL IP65

Job Name:	Job Type:
Quantity:	Comments:



57842

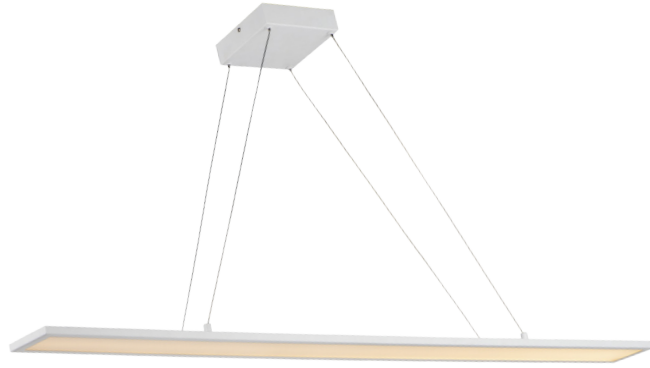

57846

### PRODUCT DESCRIPTION

Wafer was designed for the discriminate consumer who wants the low profile look of recessed without the high cost. Manufactured of die cast aluminum, Wafer brings ultimate heat dissipation to its edge lit technology. Edge lighting gives very even light distribution while dispersing heat over a larger area. The result of this is longer LED life and better light diffusion.

### FINISHES OPTIONS:

- White (WT)
- Bronze (BZ)
- Matte Silver (MS)



### MEASUREMENTS

MODEL	DIMENSIONS	CANOPY	OAH	WIRE LENGTH
57842	24"L x 4.25"W x 0.5"H	6"L x 6"W x 1.5"H	122"	120"
57846	48"L x 4.25"W x 0.5"H	6"L x 6"W x 1.5"H	122"	120"

### MATERIAL:

Aluminum  
PMMA Acrylic Diffuser

### RATINGS:

ETL/cETL IP65  
Damp Location  
Dimmable with Triac Dimmer

### LAMPING

MODEL	BULB TYPE	LUMENS	CRI	INPUT VOLTAGE
57842	18W 3000K PCB LED (Integrated)	1260 Rated (1300 Del.)	90+	120-277V
57846	36W 3000K PCB LED (Integrated)	2520 Rated (2200 Del.)	90+	120-277V



*Always consult a qualified electrician before installing any lighting product*

### ADDITIONAL:

RATED LIFE: 50,000 Hours  
OPERATING TEMP: -20° C (-4°), 40°C (104°F)  
PHOTOMETRIC: Report Found Online

# STUDIO•M

For Modifications or Customizations, please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)  
For Sample Request, please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line: "Sample Order\_[Project Name]/[Specifier/Designer]"  
All Samples are subject to Studio M approval and must show proof of project and/or explanation.