

STUDIO•M


SM369747

Please consult your electrician for hanging fixture and wiring.

1. Turn breaker off for circuit on outlet where fixture is to be installed.
2. This fixture exceeds the 50 lb. limit of outlet box and should be installed per the heavy weight fixture instructions enclosed. DO NOT INSTALL DIRECTLY TO BOX.
3. Install fixture to loop using quick link supplied.
4. Thread wire through loop and wire black to black, white to white and green to ground.
5. Position canopy to ceiling and tighten with screw collar ring.
6. Install color coded stems into corresponding colored threaded hole.
7. Before install spoke balls onto end of blue and green stems and secure with cap stem.
8. Install beveled crystal onto end of red stems and secure with cap stem.
9. Install maximum 25 watt Xenon lamps included.

WARNING!


Xenon lamps burn hot. Allow 15 minutes after turning off before touching!

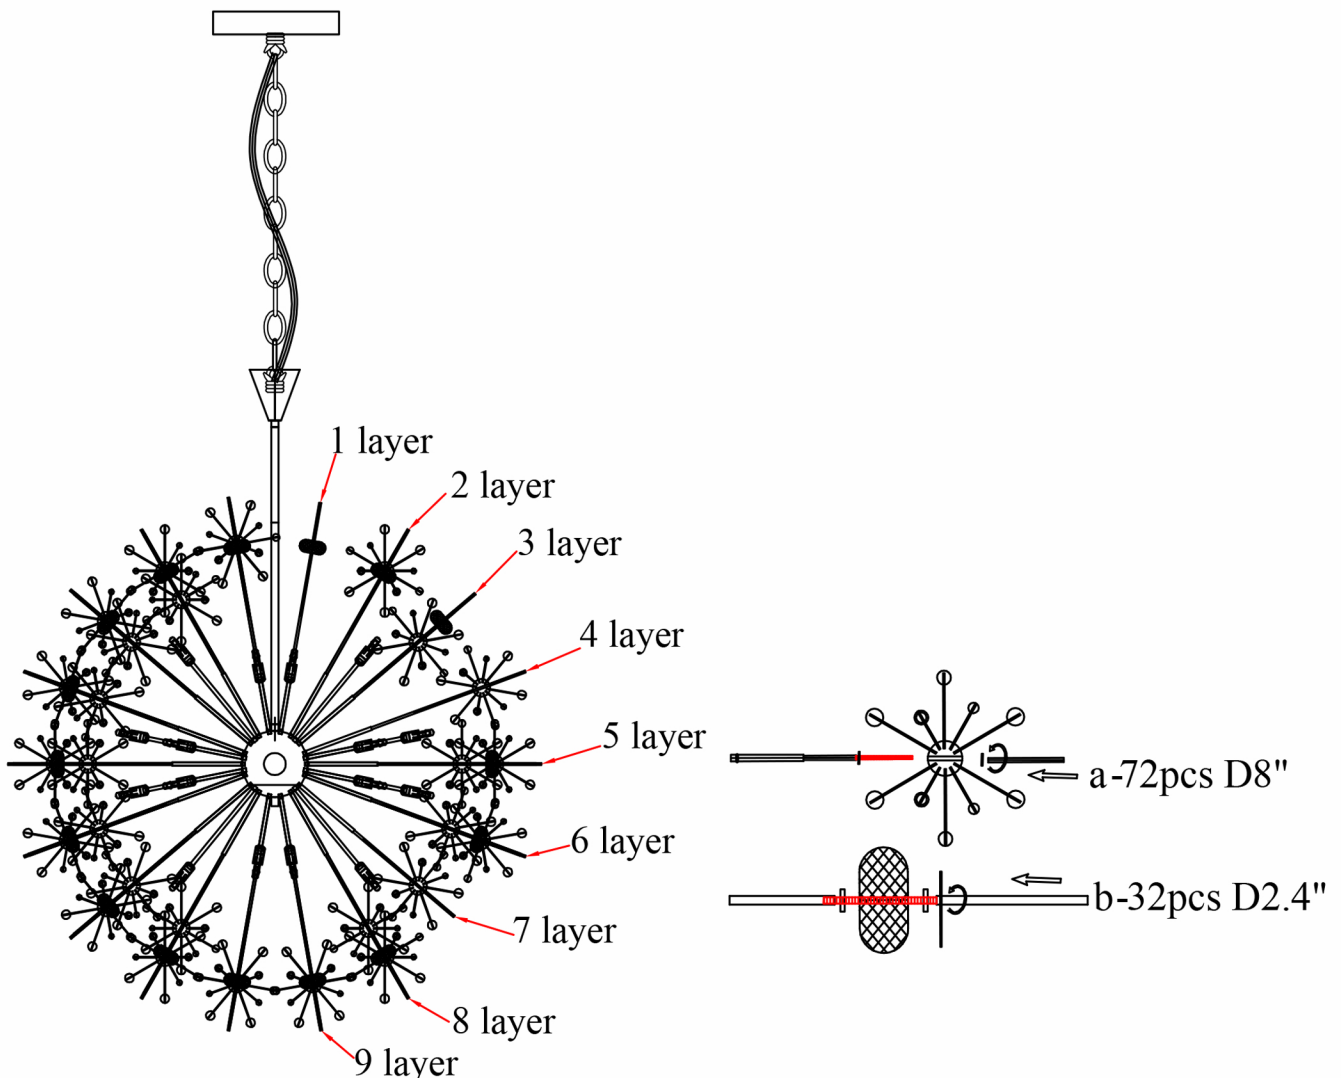

STUDIO•M

SM369747

Please consult your electrician for hanging fixture and wiring.

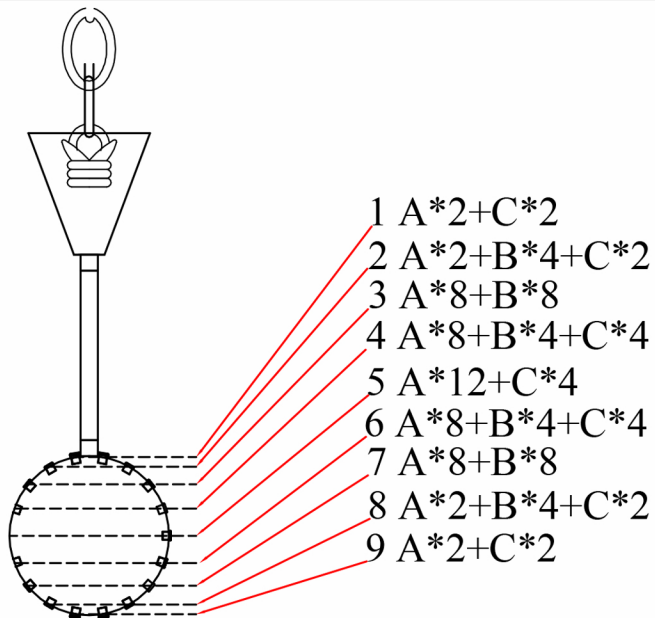

NO.	MAXIM#	Q'ty	Length	Component
A	ARM39747PC-A	52	16.34"	Spoke ball
B	ARM39747PC-B	35	16.34"	Beveled crystal
C	ARM39747PC-C	20	12.6"	Spoke ball


1 layer	2 layer	3 layer
4 layer	5 layer	6 layer
7 layer	8 layer	9 layer

STUDIO•M


SM369747

Please consult your electrician for hanging fixture and wiring.




A-Red stem:ARM39747PC-A 52pcs L16.34"

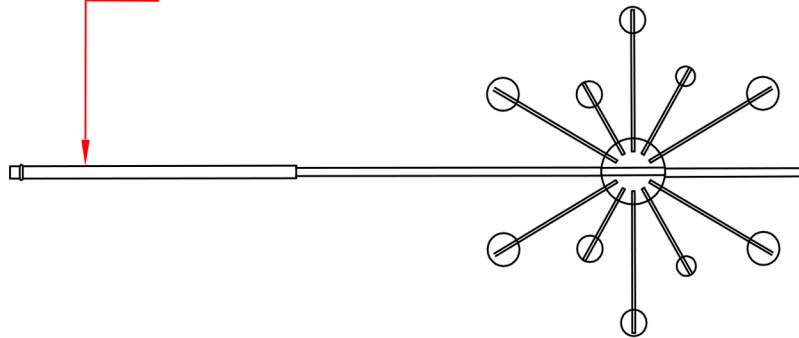

B-Green stem:ARM39747PC-A 32pcs L16.34"

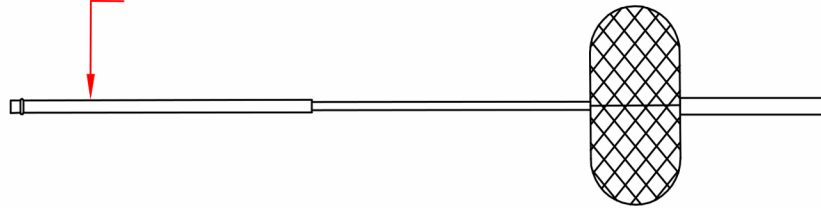

C-Blue stem:ARM39747PC-B 20pcs L12.6"

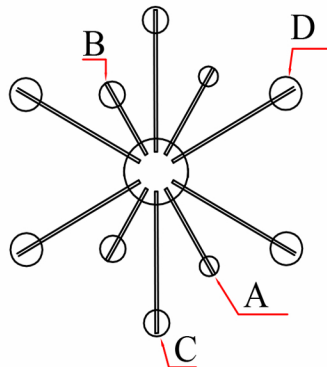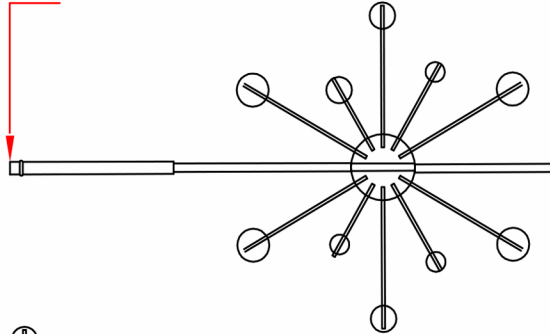

NO.	MAXIM#	Q'ty	Size
A	CJE39740-A	216	D0.5"
B	CJE39740-B	864	D0.55"
C	CJE39740-C	504	D0.7"
D	CJE39740-D	360	D0.8"
E	CRB39740	32	W2.35"*H1.2"